



**Vancouver Office**  
 #10, 3671 Viking Way  
 Richmond, BC  
 V6V-2J5  
 Phone: (604) 214-9453  
 Fax: (604) 214-9455

**Calgary Office**  
 #2, 21 Highfield Circle SE  
 Calgary, Alberta  
 T2G 5N6  
 Phone: (403) 252-0070  
 Fax: (403) 259-3992

**Edmonton Office**  
 16304 111 Avenue  
 Edmonton, Alberta  
 T5M 4G3  
 Phone: (780) 486-2111  
 Fax: (780) 486-2155

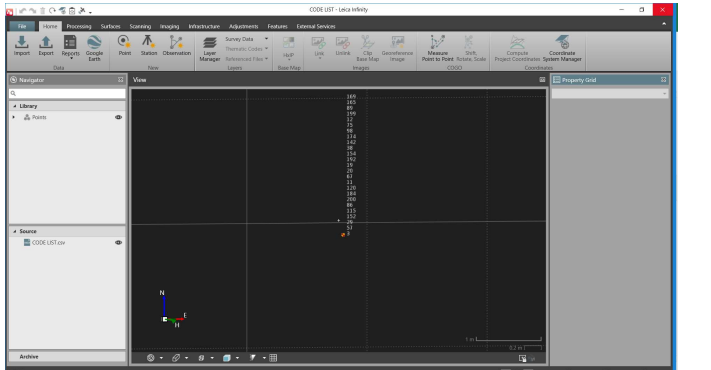
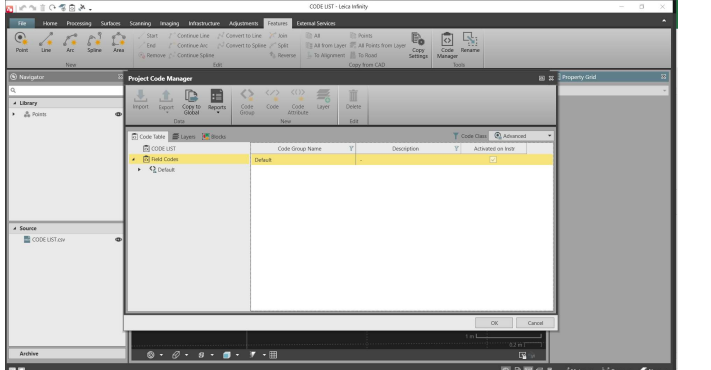
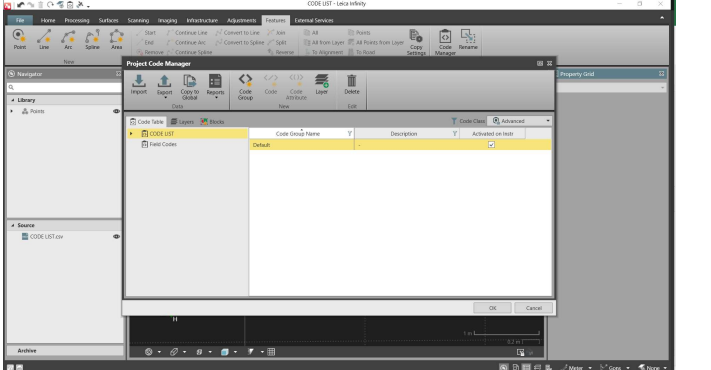
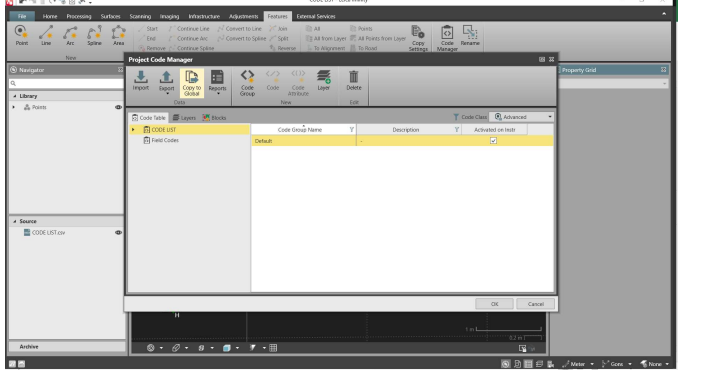
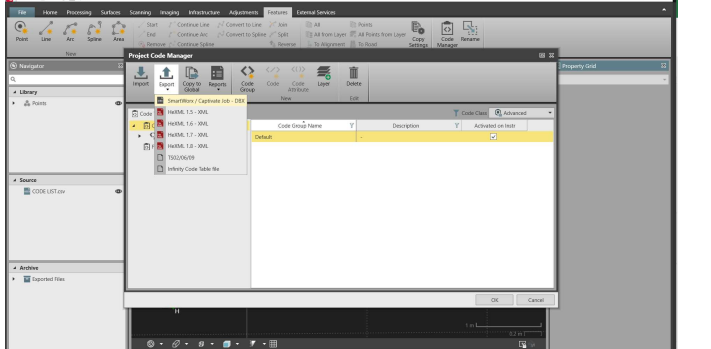


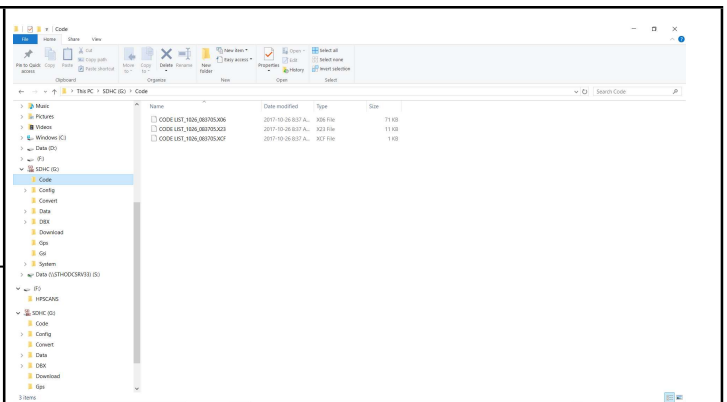
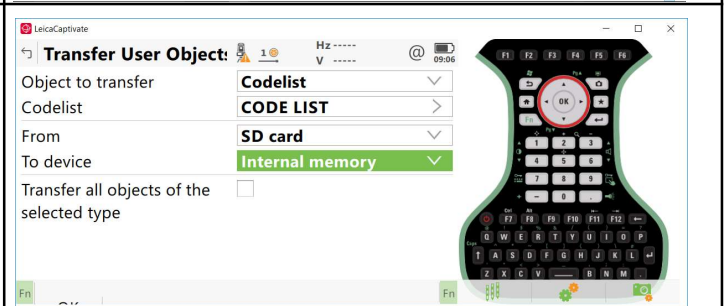
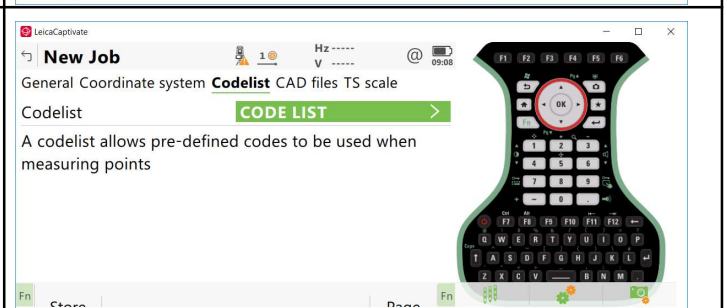
Toll-free: (855)414-9453  
 E-mail: support@stpg.ca

## Transfer Codelist Table into Leica Captivate Controller

Upon having a proper subscription license to Leica infinity, it is required to be activated and set up in the company's manager account of MyWorld.

Step	Screen Menu	Details	Visual
1.	Excel workseet table	Clean up the codelist table, add additional 4 columns, assign each row with unique Point ID, Northing, Easing, Elevation (can be any N, E, Z value), and save as .CSV comma delimited file.	
2.	Leica Infinity New project	Create a new project in Leica Infinity.	
3.	Leica Infinity Home tab	Click 'import' in home tap, choose ASCII format. Choose the csv file, then create new template in 'import settings'.	
4.	Leica Infinity new tamplate	In pop up window, choose 'comma' in column separator. Assign each column a proper attribute in preview window.	

5.	Leica infinity View Screen	Click 'ok' to import the codelist in to Leica Infinity as points with codes.	
6.	Leica Infinity Feature tab Code Manager	In features tab choose 'code manager', Click 'Field codes', highlight all code groups on the right window, press 'Ctrl+X'.	
7.	Leica Infinity Feature tab Code Manager	Click on the project name that been created, left click in the right window and press 'Ctrl+V', then Click ok.	
8.	Leica Infinity Feature tab Code Manager	Re-open 'code manager', highlight the project you created then click 'copy to global'	
9.	Leica Infinity Feature tab Code Manager	Click 'export', choose 'Smartworx/ Captivate Job -DBX' and save to your computer.	

10.	SD Card Code Folder	Insert an SD Card into computer, copy and past the 3 files created into 'Code' folder. (If the SD isn't properly formatted, you can insert the SD Card in CS20, Click Settings- Tools -Format Memory- SD Card Ok)	
11.	Leica Captivate settings-tools menue	Re-insert the SD Card into CS20, Click Settings- tools-transfer user objects-object to transfer: codelist; choose the file name; From SD card to Internal Memory, then Click ok.	
12.	Leica Captivate Create New Job	Create a new job in CS20, in codelist tab you'll see the code list name you created, click store.	
13.		The created job, should have the chosen code table available to use.	